


## GS Series Screw Compressor Package

4 Models  
25 - 150 HP

Designed for high stage, booster, or single stage operation, utilizing various refrigerants including R-717, R-22, R-507, R-134A, R-744 and others

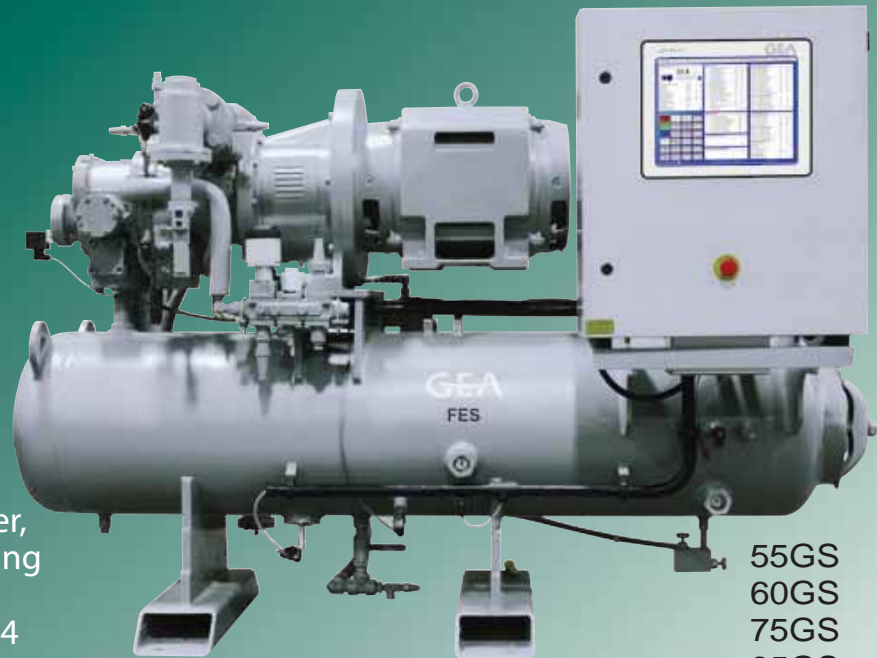

55GS  
60GS  
75GS  
85GS

### Compressor Features:

- Proprietary line-generated rotor profile and optimized rotor dimensions for improved volumetric efficiency and lower power consumption.
- 5:6 male to female lobe ratio for improved bearing load distribution, lower noise generation, and better bhp/ton performance.
- Patented flow-optimized suction inlet improves volumetric efficiency and reduces noise.
- High performance cylindrical roller axial bearings and duplex angular contact ball thrust bearings.
- Double-acting hydraulic capacity control, infinitely adjustable from 10% to 100%.
- Unique Hermetic Differential Transformer (HDT) transmits slide valve position without wear or friction and requires no external seal.
- Integrated suction strainer and check valve.
- Internal oil pump for capacity control on high stage units.
- Integrated oil filter and metering valve.

### Package Features:

- Multi-stage oil separator design guarantees low oil loss.
- Three-way thermostatic oil temperature control valve standard with oil cooler options.
- High performance, steel, elastomeric coupling with high torque center member for quick installation and removal.
- Unique keyless frictional coupling hub on the compressor end provides an easily adjustable and releasable mechanical shrink fit. This feature provides all the benefits of a shrink fit, but without the problems.
- NEMA C Face mounted Motor bolts to the coupling housing and requires no alignment.
- Advanced GForce™ microprocessor control panel is standard with options for refrigeration system control.

### Product Drawings:

- Contact your nearest GEA FES, Inc. sales representative or go to [www.geafes.com](http://www.geafes.com), click on 'Tools' . . . 'Documentation' . . . 'G Series General Arrangement (GA) drawings'.

# GS Series Compressor Packages

55GS  
60GS  
75GS  
85GS

... Small Size (4 models, 25 - 150 HP)

... Large Features

- No Speed Increasing Gears
- Extremely Quiet
- Full Unload Capability, Like Larger Compressors



## IP-67 Wire Harness System For

- Weathertight application
- Quick connect sensors
- Minimal package tubing

- Rebuildable
- Controlled by the Most Reliable Microprocessor in the Industry  
**GForce™**

## Integrated

- Suction strainer and check valve
- Capacity control solenoids
- Oil filter
- Oil pump




## Semi-hermetic Slide Valve Position Indicator

- No leaks
- 4 - 20 mA output
- Compact design

## Flexible Stainless Steel Hose For Oil Lines

- Reduced vibration
- No leaks
- Easy connections

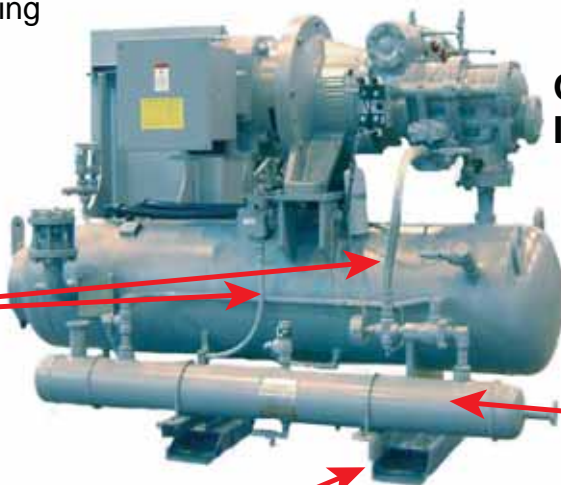

## Optional IntelliSOC Liquid Injection Oil Cooling

- Reduced package and field piping
- Precise discharge temperature control
- Low discharge pressure operation
- Lower operating costs

## Bolt on Oil Cooler

- Easy removal during installation
- Reduces package width for maneuvering in tight spaces

Forklift Movable



GEA FES, Inc.  
3475 Board Road  
York, PA 17406-8414 USA  
Tel. 717-767-6411 • Fax 717-764-3627 • www.geafes.com

Form No.  
GS08-10  
Subject to  
change  
without notice